

# Study of the Influence of Grape Leaves on the Properties and Structure of SREPT-60 Rubber Modification

<sup>1</sup>Yunis Qarayev, <sup>2</sup>Huseyinova Lamiya

<sup>1</sup>Master's Student, <sup>2</sup>Doctoral Student

<sup>1,2</sup>Azerbaijan State Oil and Industry University

DOI: <https://dx.doi.org/10.51244/IJRSI.2026.130200116>

Received: 09 February 2026; Accepted: 15 February 2026; Published: 09 March 2026

## ABSTRACT

This study investigates the modification process of SREPT-60 with grape leaves. It is shown that modification requires obtaining grape leaf nanoparticles and then performing the modification. The study found that the optimal amount of grape leaf particles for modification is 8-10% by weight. The wear resistance and electrical resistance of rubber obtained from SREPT-60 rubber compounds and grape leaves were studied. The results show that increasing the grape leaf mass to 8 parts by weight improves the overall rubber performance. At a frequency of 50 Hz, the permittivity decreases from 2.3 to 2.9, and the dielectric loss tangent  $\tan\delta$  decreases from  $10^{-2}$  to  $10^{-3}$ , while the breakdown strength increases.

In this study, grape leaves were used for the first time to modify rubber. The modification process of a composite based on SREP-60 and grape leaves was studied in detail using modern research methods. The melt flow rate of the composite was also studied to determine the processing parameters of the resulting composite.

**Keywords** Grape leaf, SREPT-60, flow index of composite polymer alloy, vulcanizate, tensile strength, residual deformation.

## INTRODUCTION

In industry, SREP-60 is a basic polymer widely used in various industries. [1-5] In addition to excellent heat resistance, low-temperature elasticity and flexibility, weather resistance, oxidation resistance, ozone resistance, and aging resistance, SREP-60 also offers potential applications in automobiles, roofing membranes, sealants, pipes, belts, radiators, thermal insulation, and electrical insulation. [6-11] However, this valuable rubber has several drawbacks, primarily its low mechanical strength and ozone and electrical resistance. To improve these shortcomings, SREP-60 has been modified with various modifiers and methods. [12-15] Many authors have shown that the properties of SREP-60 rubber are improved by vulcanization, creating a cross-linked structure using sulfur as a vulcanizing agent. A second study [of modified SREP-60-based composites] concluded that it is necessary to investigate the rheological properties and behavior of polymer systems under deformation [16-21]. These properties determine the relationships linking stress, strain, and strain rate [22-24]. These relationships, obtained at various temperatures and deformation regimes for polymers with different molecular weights and polymer systems of varying compositions, provide valuable information about their properties, structure, and structural transformations and are of fundamental importance when considering problems associated with the processing of such systems [25-29].

## Method

In this research, electron microscopy and other structural analysis methods were used to analyze parameters such as tensile strength, elasticity, wear resistance, as well as the morphology and phase structure of the material. The aim was to evaluate the potential of using grape leaves as a biocompatible and environmentally friendly component for rubber modification, potentially improving its performance or reducing its cost. For the first time, we have approved the use of SREPT-60 with grape leaves as a protective coating for railway cables.

### • Grape Leave

As grape leaves, a grape variety called Shani, which is found in the Novkhane vineyards, was used in this study,

which is explained by the presence of carbohydrates and functional groups in such leaves compared to other grape varieties. As a result of the analysis conducted by the Microbiology Research Institute, the main composition of grape leaves (it was not possible to determine all ele The chemical composition of grape leaves includes proteins, fats, carbohydrates, ash, fiber, iron, potassium, calcium, magnesium, manganese, copper, phosphorus) and phytonutrients (beta-carotene).

• **Mixing and vulcanization:**

Grape leaves are ground into powder and mixed with SREPT-60 rubber using special equipment, after which the mixture is vulcanized.

**RESULTS OF EXPERIMENTAL RESEARCH**

As a result of the research we conducted to prepare the composition for the dissertation work, when we adopt the recipe shown in Table 1 as optimal:

Table1.Composition of rubber mixtures based on SREPT-60 and grape leaves

Indications	What is known			Suggested		
	Example Names			Example Names		
Components	Q1	Q2	Q3	Q4	Q5	Q6
SREP-60	100	100	100	100	100	100
Grape Leave	-	-	10	6	10	12
Biopolymer(tree resin)	10	10	10	-	-	-
Fuel oil	4	-	-	-	-	-
DUEK-4(bis-dihidrotsiklopentadienil kapromate)	-	6	6	6	6	6
Sulphur	2	-	2	2	2	2
Captax	0,5	0,5	1	1	1	1
Altax	0,5	0,5	1	1	1	1
ZnO- zinc oxide	4	4	4	4	4	4
Antioxidant	2	2	2	2	2	2
Technical stearin	1	1	1	1	1	1
petroleum resin	2	2	2	2	2	2
Technical carbon P-803	20	20	20	20	20	20

**Selecting the optimal recipe and preparing the composition based on it**

We adopted the formula given in Table 2 to prepare a binary system based on SREP-60 and Grape Leaf in different proportions.

Table 2 Binary system based on SREP-60 and Grape Leaf

Example Components	Q1	Q2	Q3	Q4	Q5
SREP-60	100	100	100	100	100
Grape Leave	-----	4	6	10	12
Total	100	104	106	110	112

**Results of basic analyses of compositions prepared based on SREPT-60 modified with grape leaves**

We developed a composition using an optimal formulation and studied its physical, mechanical, and physical, chemical properties using state-of-the-art scientific research methods. The results are presented in Figures 1–9.

The results of infrared spectroscopy studies are presented in Figures 1 and 2.

Within the framework of the study, the IR spectra of the obtained composition were comparatively analyzed and as a result of the modification according to the obtained wavelengths, broad and intense signals were observed in the spectrum in the region of  $3545.52\text{ cm}^{-1}$  and  $3492.58\text{ cm}^{-1}$  wave numbers, which means that the functional groups in the grape leaf found their place in the main chain of the polymer and sat on the main chain.


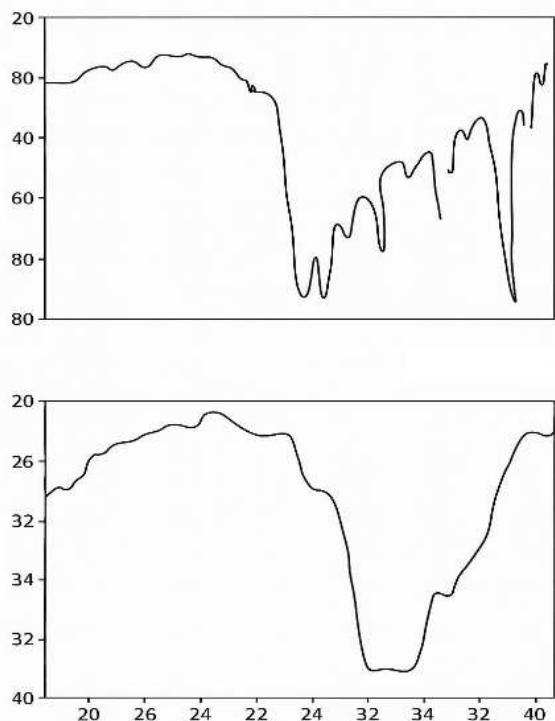


Figure 1. IR spectra of pure elastomer SREPT-60

Binary mixtures based on SREP-60 and grape leaf were prepared. Their rheological properties (primarily the alloy flow index) were studied. Melt flow indices were studied at various loads of 11.75, 20.85, 26.10, and 32.60 kg and temperatures of  $130^{\circ}\text{C}$  -  $175^{\circ}\text{C}$ . Experiments were conducted on an IIRT-5 instrument. Based on the obtained data, a report was compiled, graphs were plotted, and process parameters were determined.

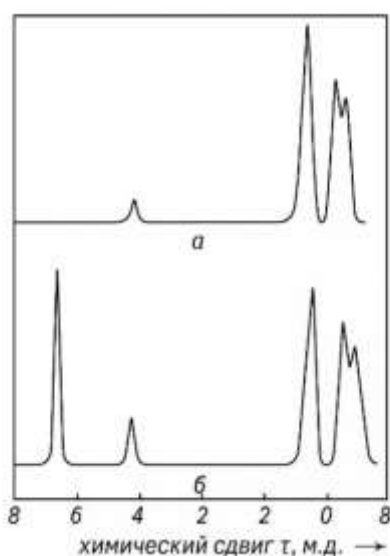

chemical shift

IR spectra. Grape leave composition – 8% (mass).

Figure 2 NMR spectra of SREP (a) and SREP-60 (in  $\text{C}_6\text{D}_6$  solution) modified with grape leaves (b).


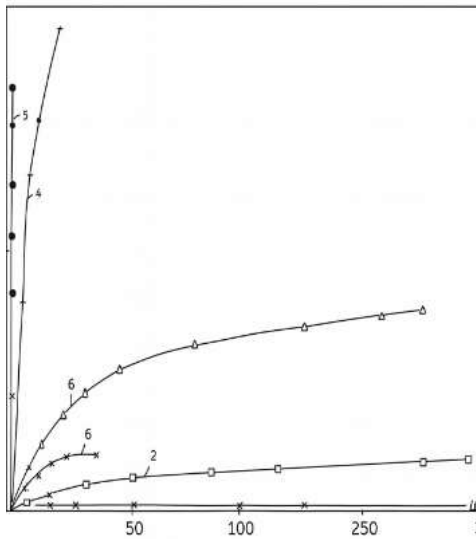


Figure 3. Stress-strain curves of SREP.T-60 modified with grape leaves

Component content (% by weight): 1 – pure SREP.T-60; 2. SREP.T-60 + grape leaves – 4; 3. SREP.T-60 + grape leaves – 6; 4. SREP.T-60 + grape leaves – 8; 5. SREP.T-60 + grape leaves – 10 –

In this work, we also determined the extent to which the SREP elastomer, SREPT-60, would be modified by UF, and the results obtained are presented in Figure 4.

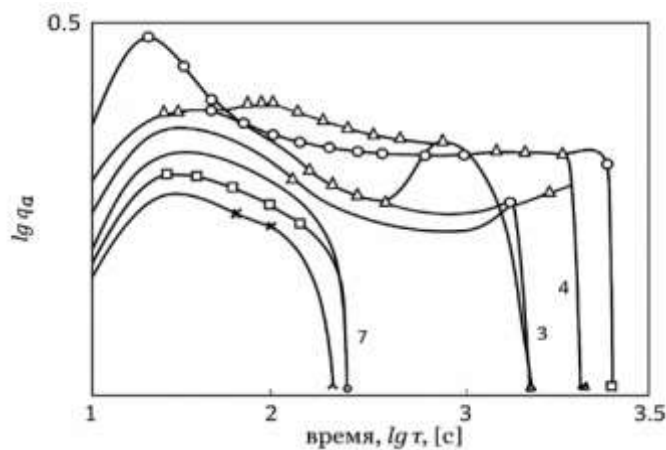

Time

Figure 4. Relaxation time spectra of SREP-60 (1) modified with grape leaves. Content of grape leaves, % (mass): 2 – 5; 3 – 6; 4 – 8; 5 – 10; ; T = 100<sup>0</sup>C

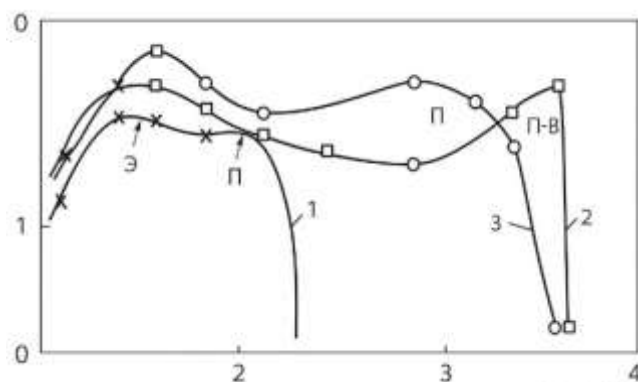


Figure 5. Relaxation time spectra of SREP and SKEPT-60 modified with grape leaves. .

- 1 — original; 2 — modified SREP-60 (Grape Leave – 5% (mass));
- 3 — mechanical mixture of SREP-60 with Grape Leave – 10% (mass)

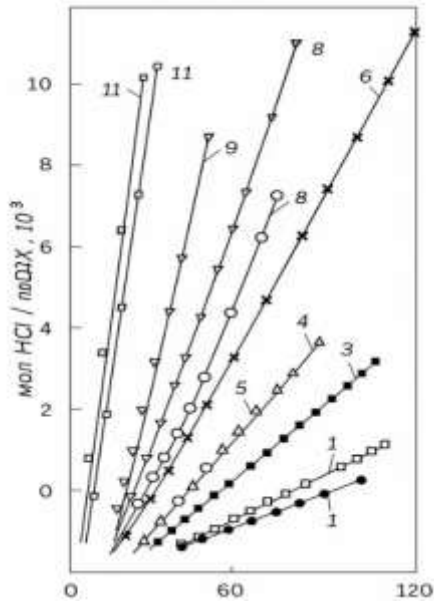


Figure 7. Thermal decomposition of SREP-60 modified with Grape leaf as a function of time at different temperatures and grape leaf composition. Grape leaf content, % (mass): 1 — 6; 2 — 10 ; 3 — SREP-60 (T = 160 °C, in nitrogen atmosphere); 4 — 63; 5 — 13; 6 — Grape leaf (T = 170°C, in nitrogen atmosphere); 7 — 6 ; 8 — 10; 9 — Grape leaf (T = 180°C, in nitrogen atmosphere); 4 — 10; 11 — 63 (T = 185°C, in oxygen atmosphere)

The rubber compound was prepared using the optimal formula and vulcanized at 158°C, after which the key vulcanizate parameters were determined. The results are presented in Table 3.

Table 3. Physical and mechanical properties of vulcanizates based on SREP-60 + grape leaves

Name of key indicators	Requirements of the standard			Results from the experiment		
Tensile strength, MPa	17	16,6	16,7	16,5	19,7	18,5
Relative elongation, %	320	330	300	350	370	385
Relative residual deformation, %	12	14	12	12	12,3	12,6
Tensile strength, kN/m	65	64	68	66,9	68,7	68,9
Friction, cm <sup>3</sup> /Wh	58	61	55	60	57	51
Brittleness temperature, °C	-	-	27	25	23	23
Strength on TM-2,	81	79	75	81	80	83
25°C for 24 hours, swelling degree at temperature, %: in a mixture of isooctane with gasoline (70:30)	11	13	13,9	10,4	11,1	10,7

## RESULTS

In this study, grape leaf modification was used to improve the key performance characteristics of SREPT-60. This is the first time we have used grape leaf as a modifier for SREPT-60. An optimal formulation based on SREPT-60 and grape leaf was developed. The optimal grape leaf content for modifying SREPT-60 was determined, showing that the optimal amount of grape leaf for modifying SREPT-60 is 6-8 parts by weight. A composite based on SREPT-60 and grape leaf was prepared, and the physical and mechanical properties of the vulcanizates were determined after vulcanization. It was shown that modifying SREPT-60 with grape leaf increases the mechanical strength and wear resistance of the rubber base. These data allow its use on an industrial scale.

## REFERENCE

1. Alizade Tarlan *PHYSICO-MECHANICAL PROPERTIES OF PETROLEUM ROAD BITUMEN MODIFIED ON THE BASIS OF STYRENE-BUTADIENE BUTYL RUBBE*, 2024, Innovative scientific research Proceedings of the IX International Scientific and Practical Conference 14-15 March , **Pp34-40** DOI: <https://doi.org/10.5281/zenodo.10882832>
2. G. Barrera Torres, Carlos M. Gutierrez Aguilar, Elizabeth R al. et . *Application of Post-Industrial Leather Waste for the Development of Sustainable Rubber Composites* *Polymers* **2025**, *17*(2), 190; DOI: [10.3390/polym17020190](https://doi.org/10.3390/polym17020190)
3. Gambaro D.SH., Ibrahim Nabila F. Geographical areal types of Astaxanthin and Astragals species spread in Nakhichevan Autonomous Republic // Kafka's Universities Fen Balmier Entities 2011, pp.58-64.NO DOI
4. Gambaro D.SH. Floristic analysis of the species of Astaxanthand Astragals spreading the area of the Nakhichevan Autonomous Republic // European Academic Rehears, 2013, Impact Factor 0,485: p. 2586-2593
5. Gambaro D.SH. Spreading of Astaxanthin and Astragals species on the highland zones of the Nakhichevan autonomous republic // European Academic Research, 2014, Impact Factor 3,1: p.-4153-4159 / DOI: [10.32388/ZCAXYW.2](https://doi.org/10.32388/ZCAXYW.2)
6. kerem Seyfi Modification of the used up polymeric materials and investigation thof e properties of the materials obtained. *Journal of Medical Pharmaceutical and Allied Sciences*, 2022, 11(2), pages 4697–4702 DOI: [10.35940/ijitee.G5721.079920](https://doi.org/10.35940/ijitee.G5721.079920) 5..Kerem Shixaliyev. Investigation of the subsequent use of lands along the Araz River contaminated with heavy metals,2023, *JOURNAL OF AERONAUTICAL MATERIALS*ISSN N: Vol. 43, Issue-01, pp. 102-111,<https://www.hkclxb.cn/article/view/2023/102.html>
7. Kerem Shixaliyev Research New Ways of Processing Polymer Waste that was Formed as a Result of Operation321-335 *Novel Perspectives of Geography, Environment and Earth Sciences* Vol. 1 *Vol. 1*, 22 December 2022 , Page 25-35<https://doi.org/10.9734/bpi/npgees/v1/17431D>
8. Kerem Shixaliyev *PROPERTIES OF THE COMPOSITION BASED ON MODIFIED POLYETHYLENES* , 2023, *Eur. Chem. Bull.* , 2023; Volume -12 , Special Issue-5 : Page: 242-258 . doi [10.31838/ECB/2023.12.si5.023](https://doi.org/10.31838/ECB/2023.12.si5.023)
9. Kerem Shixaliyev Study of the Properties of the Composition Obtained Based on Mixtures of Polyvinyl Chloride and Ethylene-Propylene Copolymers International ,2023,*Journal of Current Science Research and Review* ISSN: 2581-8341 **Vol 6 No 1 (2023): Volume 06 Issue 01** January ,pp314-318 doi [10.31838/ECB/2023.12.si5.023](https://doi.org/10.31838/ECB/2023.12.si5.023)
10. Kerem Shixaliyev.Investigating Recycling Methods of End-of-Life Car Tires,2023, *Journal of Advanced Zoology*, Volume 44 Issue S-3 Year 2023 Page 1149:1157 ,DOI: <https://doi.org/10.17762/jaz.v44iS-3.1205>
11. Kerem Shixaliyev Investigation of the Properties of a Composition Obtained based on Mixtures of Polyvinylchloride and Synthetic Rubber Ethylene Propylene Terpoliomer2023,*Editorial Board of Journal of Coastal Life Medicine* editor special issue eurchembull . Vol. 11: Number 1, 2023 *JCLMM* 1/11 pp.|2653–2658, <https://www.jclmm.com/index.php/journal/article/view/741>
12. 117-126Technology, DOI: [10.35940/ijitee.G5721.079920](https://doi.org/10.35940/ijitee.G5721.079920)
13. Md Najib Alam, Siraj Azam, Jongwan Yun and Sang-Shin Park.: *Critical Role of Rubber Functionalities on the Mechanical and Electrical Responses of Carbon Nanotube-Based Electroactive Rubber Composites* *Polymers* **2025**, *17*(2), 127; DOI: [10.3390/polym17020127](https://doi.org/10.3390/polym17020127)
14. Lama Jabreen, Moorthy Maruthapandi, Arulappan Durairaj. *Ultrasonic Deposition of Cellulose Nanocrystals on Substrates for Enhanced Eradication Activity on Multidrug-Resistant Pathogens* *Polymers* **2025**, *17*(2), 154; DOI: [10.3390/polym17020154](https://doi.org/10.3390/polym17020154)
15. Marina V. Parchaykina, Elena V. Liyaskina, Alena O. Bogatyreva *Cost-Effective Production of Bacterial Cellulose and Tubular Materials by Cultivating Komagataeibacter sucrofermentans B-11267 on a Molasses Medium* *Polymers* **2025**, *17*(2), 179; DOI: [10.3390/polym17020179](https://doi.org/10.3390/polym17020179)
16. Rahimli Karamat, Mammadova Rasmiyya.Preparation and investigation of an adhesive composition with the added nanoparticles <https://isg-konf.com/wpcontent/uploads/2024/05/INNOVATIVE-SOLUTIONS-IN-PUBLIC-COMMUNICATIONS-AND-INTERNATIONAL-RELATIONS.pdf#page=43>

17. Rasmiyya, Mammadova, Afsuna, Asgarli. CHEMICAL MODIFICATION OF MALEIC ANHYDRIDE-STYRENE COPOLYMER AND INVESTIGATION WITH SPECTROSCOPIC TECHNIQUES. German International Journal of Modern Science / Deutsche Internationale Zeitschrift für Zeitgenössische Wissenschaft, 2024, n. 80, p. 16, doi. 10.5281/zenodo.11211848
18. Shuta Hara, Akiko Kojima, Atsushi Furukawa, al. et Mechanical Properties and Decomposition Behavior of Compression Moldable Poly(Malic Acid)/ $\alpha$ -Tricalcium Phosphate Hybrid Materials *Polymers* **2025**, 17(2), 147; DOI: 10.3390/polym17020147
19. Shuta Hara, Akiko Kojima, Atsushi Furukawa, al. et Mechanical Properties and Decomposition Behavior of Compression Moldable Poly(Malic Acid)/ $\alpha$ -Tricalcium Phosphate Hybrid Materials *Polymers* **2025**, 17(2), 147; DOI: 10.3390/polym17020147
20. Youssef Cherradi, Camelia Cerbu, Ioan Calin Rosa al. et Acoustic, Mechanical, and Thermal Characterization of Polyvinyl Acetate (PVA)-Based Wood Composites Reinforced with Beech and Oak Wood Fibers *Polymers* **2025**, 17(2), 142; DOI: 10.3390/polym17020142
21. Kerem Shixaliyev. Theory and practice of obtaining composite materials based on polymer blends. Proceedings of the Fourth International Conference of European Academy of Science BONN, GERMANY. 2019, -p. 32-33.
22. Shixaliyev K.S THEORY AND PRACTICE OF OBTAINING COMPOSITE MATERIALS BASED ON POLYMER BLENDS NVEO/Natural Volatile & Essential Oils. Nat. Volatiles & Essent. Oils, 2021; 8(4): pp. 6173-618513p..
23. Shixaliyev K.S Methods of Modification of Used Polyolephines. Indian Journal of Advanced Chemistry(IJAC) Volume-1, ISSOktoberober,2021/hh/14-18
24. Shikhaliev K.S., Balaev V.G., Khanzariev S.A. Centralizer for casing strings. Oil and gas., Baku: Izv. Universities of the USSR. 1987, No. 11, p. 30-50
25. Shikhaliyev K.S., to compositions and products based on polyvinyl chloride fundamental science. The Aztec, 2004, no. 2 pp. 37-40.
26. Shikhaliyev K.S. The scientific basis of research on obtaining polyethylenes and copolymers modified with fillers, stabilizers, and radiation exposure (collective monograph. Interactive Plus Iz-vo - "Interactive Science" Cheboksary (collective monograph) 2018.-296c.info@interactive-plus.ru
27. Sh.ikhaliyev K.S. Manufacturing technology of the probe of nuclear magnetic logging NMR. International scientific journal United –Journal Tallinn-2018- N11 – pp. 36-38. E-mail: [issue@united-journal.info](mailto:issue@united-journal.info)
28. H. Mövlayev , A.F.Məmmədova N.I.Rasulzade INVESTIGATE THE FEASIBILITY AND EFFECTIVENESS OF MODIFYING STYRENE-BUTADIENE RUBBER WITH STYRENEBUTADIENE-STYRENE. MacroFrontiers 2025"3rd International Conference on Macromolecular Compounds Dedicated to the 105th Anniversary of Azerbaijan State Oil and Industry University April 24-25, 2025 – Baku, Azerbaijan p.531-535
29. Ibrahim H. Movlayev. COMPOSITIONS BASED ON EPOXIDIAN OLIGOMER MODIFIED WITH LOW MOLECULAR BUTADIENE-NITRILE RUBBER PPOR, Vol. 26, No. 3, 2025, pp.688-696 <https://doi.org/10.62972/1726-4685.2025.3.688>
30. Shikhaliev K. Studying the crosslinking mechanism and structure of cross-linked polyethylene. Eurasian Union learned (ESU). U. Moscow Monthly scientific journal. 2018.-No4 (49) .3 part. S. 73-77.